


FEATURE

- . 낮은 용량의 인장 & 압축 로드셀
- . 저용량의 푸쉬풀 시험기에 적합

SPECIFICATION

MODEL	CUS
Rated capacity (R.C.)	500gf to 2kgf
Rated output (R.O.)	1.2 ~ 1.5 mV/V
Zero balance	± 0.2 mV/V
Combined error	0.2% R.O.
Repeatability	0.2% R.O.
Creep for 30 min	0.05% R.O.
Temp. effect on zero value	0.5% / 10°C
Temp. effect on output value	0.5% / 10°C
Excitation recommended	5V DC
Terminal resistance, input	350 ± 40Ω
Terminal resistance, output	350 ± 40Ω
Insulation resistance	> 1000MΩ @ 50V DC
Compensated temperature range	0 to +50°C
Operating temperature range	-10 to +60°C

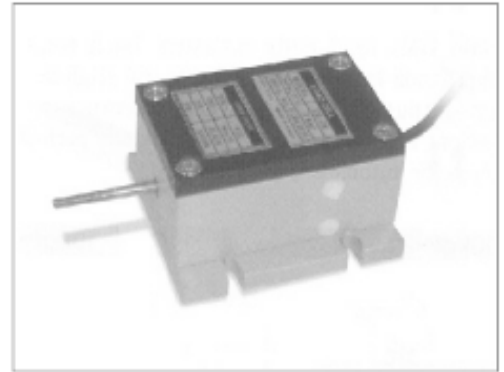

- Cable
Braided shield 4-wire round cable
with PVC-jacket

DIMENSION (mm)

